

H

4.3

_V1.0

H-OS09

注意事项

1. 请远离强磁场、高温、潮湿等环境。



1.

2.1

2.2 .

7.1

7.2

7.3

7.4

7.5

7.6

7.7

7.8

RFID (IC)

1.1

- 4.3 TFT
- IC
- LED
-
-
- /
- 12V / 800mA > 18V
- 99% 1

1.2

Android 6.0.1 CPU A64 4 1.5GHz
1GB DDR3 8GB eMMC TF 128GB
10000


DC 24V ≤ 200mA
≤ 300mA 800mA -40 +70
320mA

CMOS 200W
123 ° 3.5mm
0 lux


LCD 4.3 ”
480 × 272

W/H/D 148.5 × 363 × 47 mm


2.1

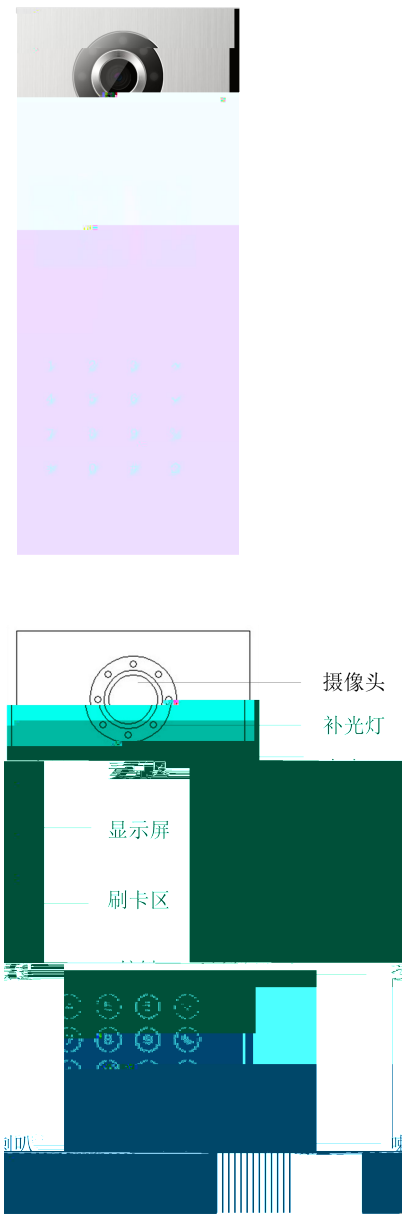

2.2

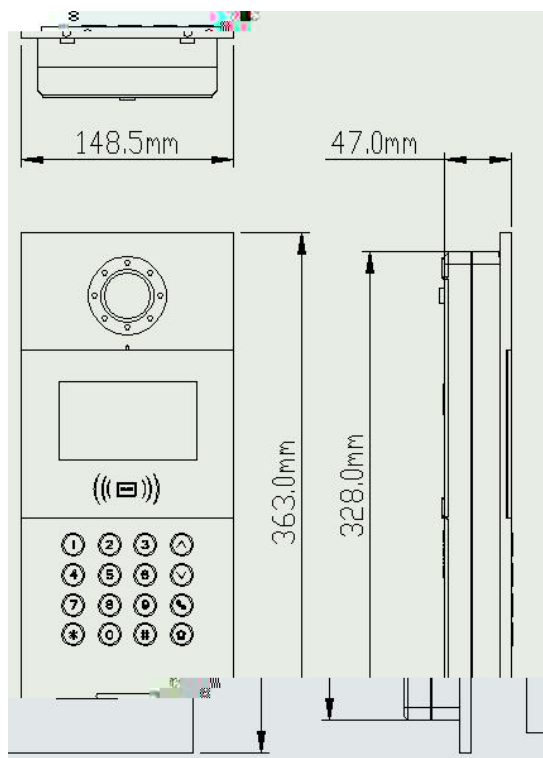

2.3

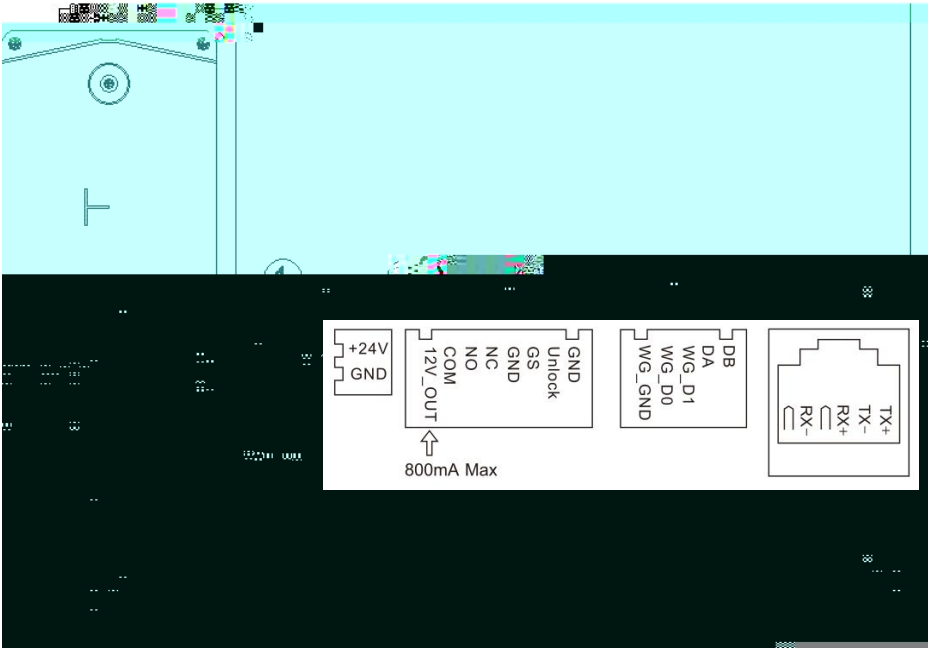

DC 24V

DC 18-30V

+12V

>18V

+12V

COM NO NC

GS


UNLOCK GND

WG-GND WG-D0 WG-D1


DA DB 485

PoE 48V


3.1



× ×





3.2

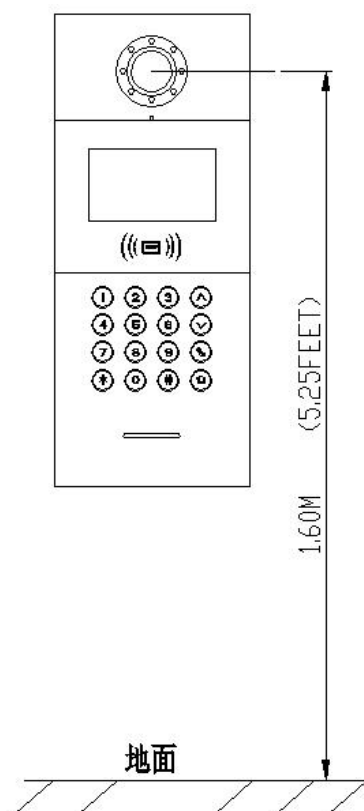



3.3

●

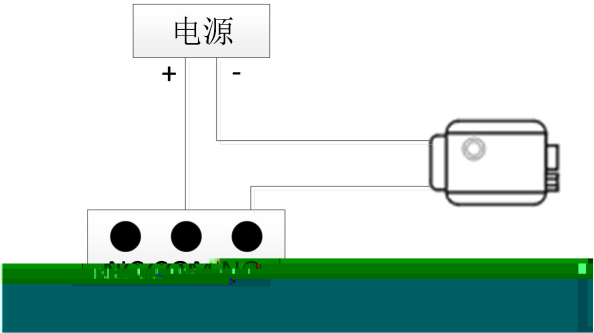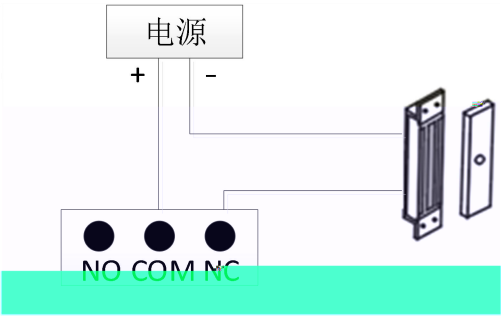


800mA

●

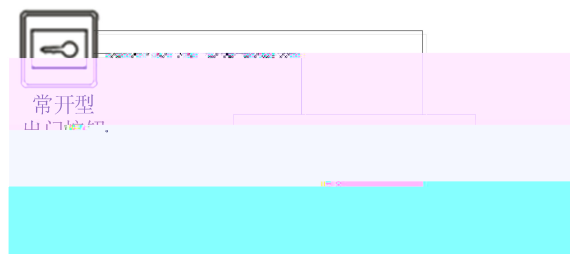

●

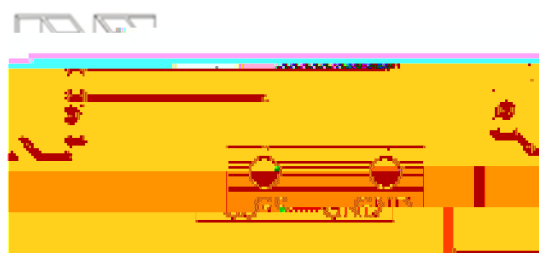

1. GS
2. “ -> -> ”

4.1

0101 " * "

30

1 99 + 1 9 + 011+0107

4.2



4.3

1.

2.


3.

+ + #
* + # + + + #
→

4.
1



2

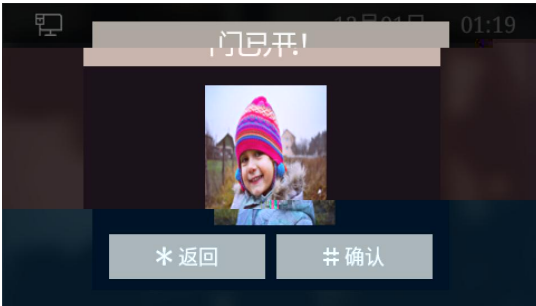

→



4.4

PC

“ # ”

请输入房号:

请输入个人密码:

*

返回

#

确认

注册

管理

*

返回

#

确认

请保持脸部位于中间位置

*

返回


#

确认



44


33

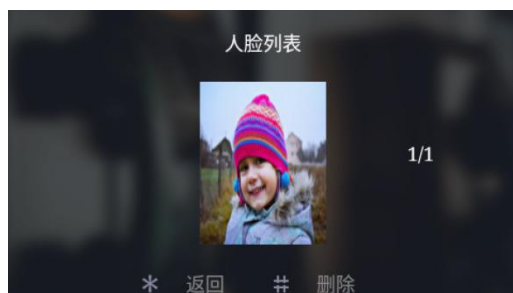

“ # ”

“ * ”

5.1

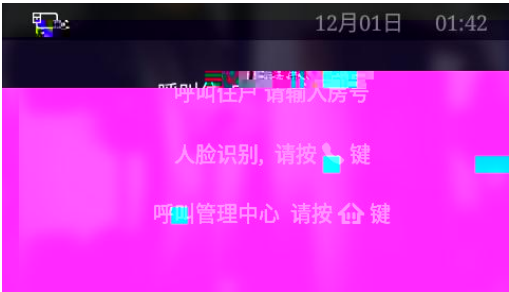

5.2

“ # ” “ * ”

“ 801801 ”



5.3

“ # ”

“ # ”



“ # ”




6.1

“ # ”

“ # ”

“ # ”

“ * ”

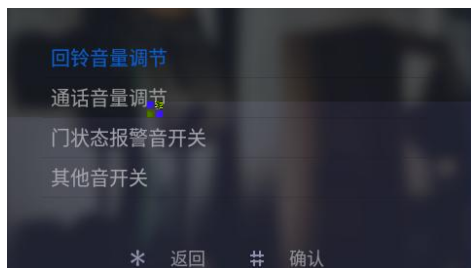

6.2

“ # ”

“ * ”

“ # ”



6.3

“ # ”

“ # ”




6.4


“ # ”

“ * ”

“ # ”

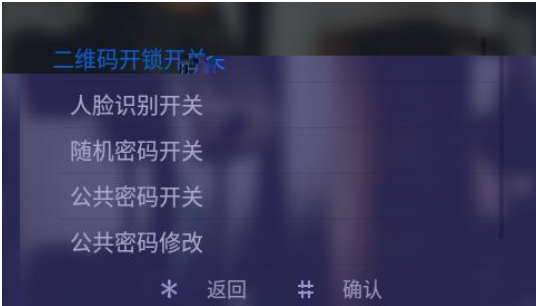


6.5

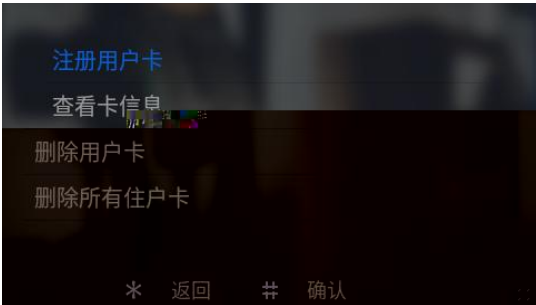

●

“ ★ ”

“ ★ ”

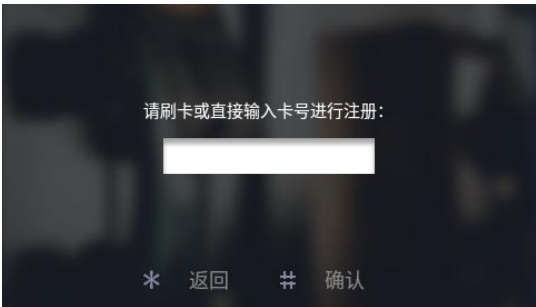

●




●

“ ” “ ” “ # ” “ ★ ”

●

“ . ” “ # ”

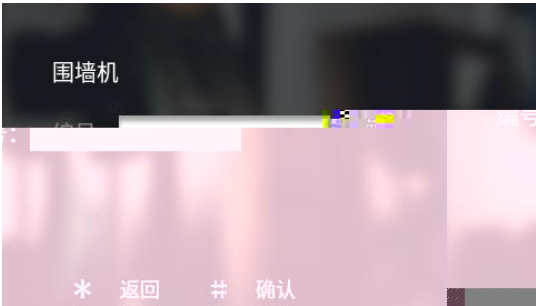



●

IC IC IC

6.6



6.7

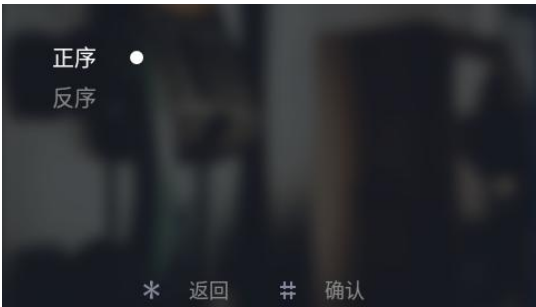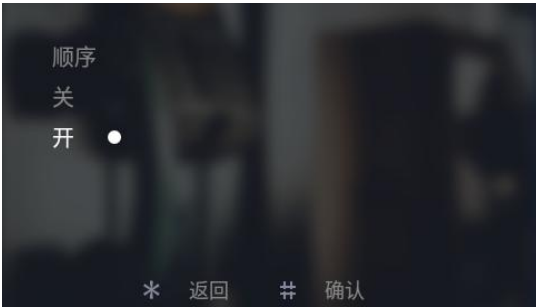

“ # ”





7.1

p



“ # ”

0

PC

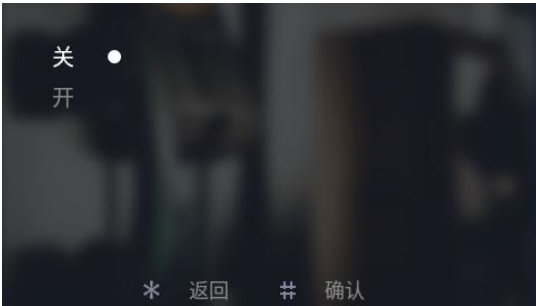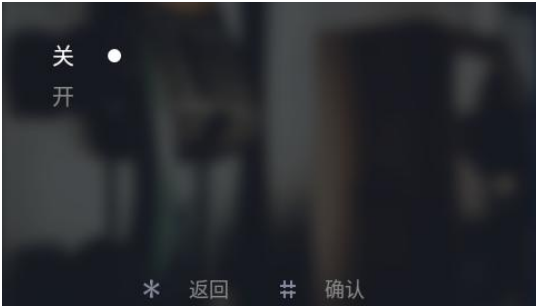

7.2

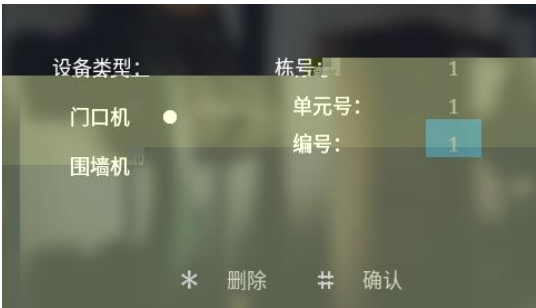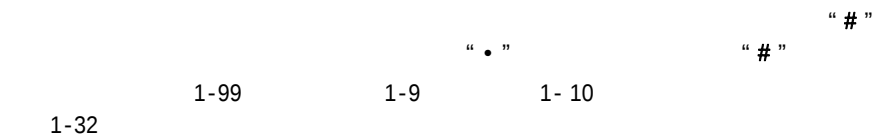


7.3





“#”

“*”

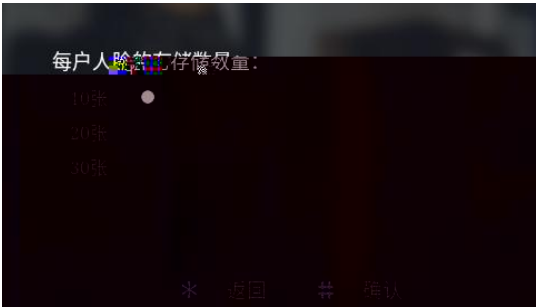


“#”

“*”



7.4


“ # ”

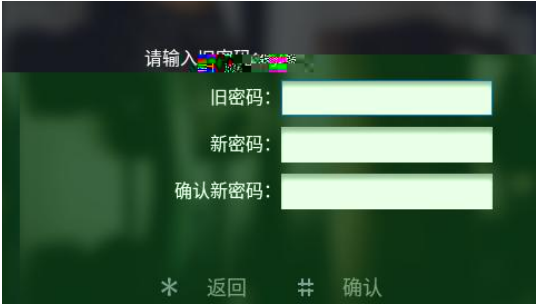


7.5

“ # ”

“ * ”

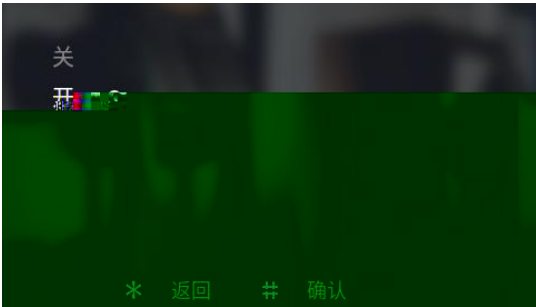

7.6

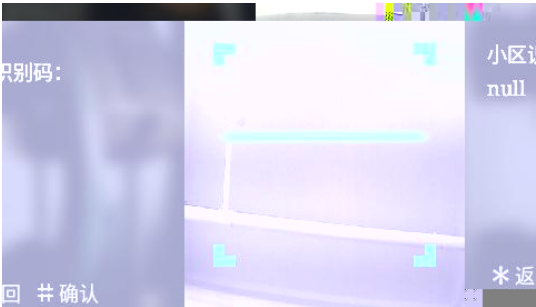

7.7



7.8



