



H

H-OS05

_V1.1

汁辛市場

2018年10月15日



		1
1.1		1
1.2		1
		2
2.1		2
2.2		3
		4
3.1		4
3.2		5
3.3		6
		8
4.1		8
4.2		8
4.3		8
4.4		8
4.5		9
4.6		9

H
IC

1.1

● IC
●
●
●
● /
●

1.2

1

DC 24V

$\leq 60\text{mA}$

$\leq 130\text{mA}$

-20 ~55

-40 ~70

(W/H/D) 120 × 194 × 44.7mm

2

CMOS

30W


95 °

0 lux

2.2mm

12 °

2.1


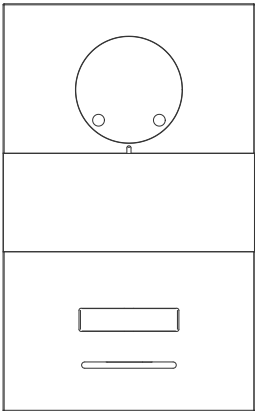


2.2




RJ45					24V	PoE
NO	COM	NC	/			
GS	GS-GND					
GND	DC+					

3.1


	W/H/D : 100.6 × 175.5 × 39mm
	
	

3.2

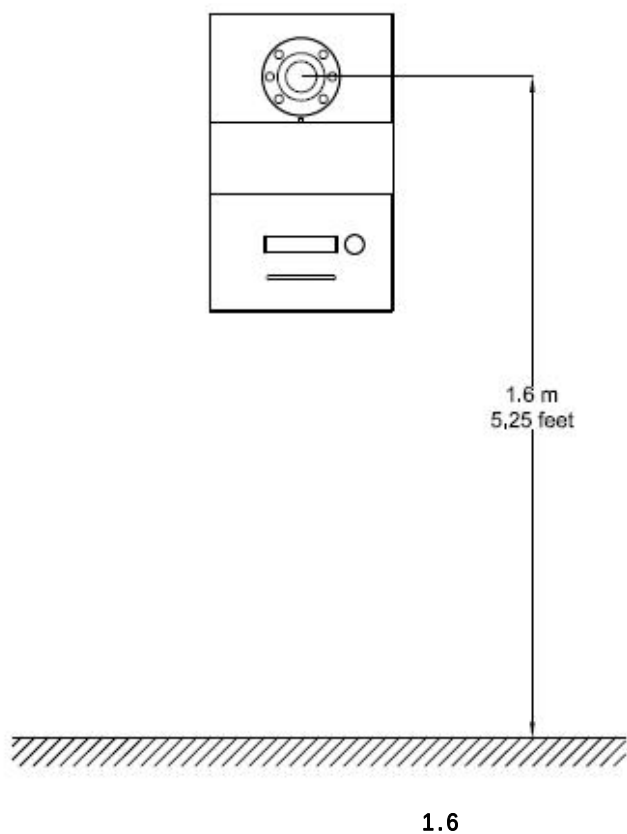

3.3

-

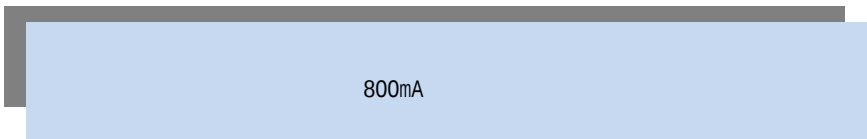

•



•



4.1

30

4.2

1)

2)

3)

4.3

5S

GVS

1

30

4.4

10000

IC
PC

PC

1

 PC

4.5

120



4.6

