

M **_V1.0**
M-AS01

注意事项

- 1、请远离强磁场、高温、潮湿等环境；



- 3、不要使用湿布或具有挥发性的试剂擦拭设备；

		1
1.1		1
1.2		1
		2
2.1		2
2.2		3
2.3		4
		5
3.1		5
3.2		6
		7
4.1		7
4.2		7
4.2.1		7
4.2.2		8
4.3		8
4.3.1		8
4.3.2		9
4.3.3		9
4.3.4		9
		10
5.1		10
5.2		11
5.3		

6.4		14
6.5		16
6.6		16
		17
7.1		17
7.2		18
7.3		18
7.4		19
7.5		19
7.6		20

M

TCP/IP

1.1

- 7 TFT
- IC
- LED
-
- /
-


1.2

DC 24V


20

04

2.1

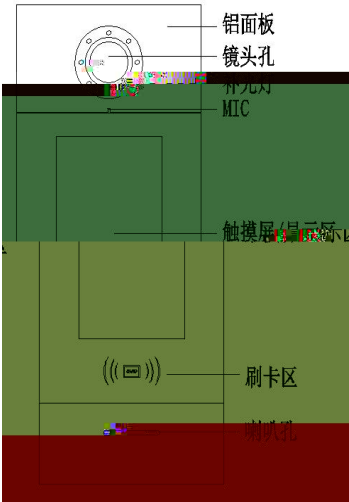

2.2

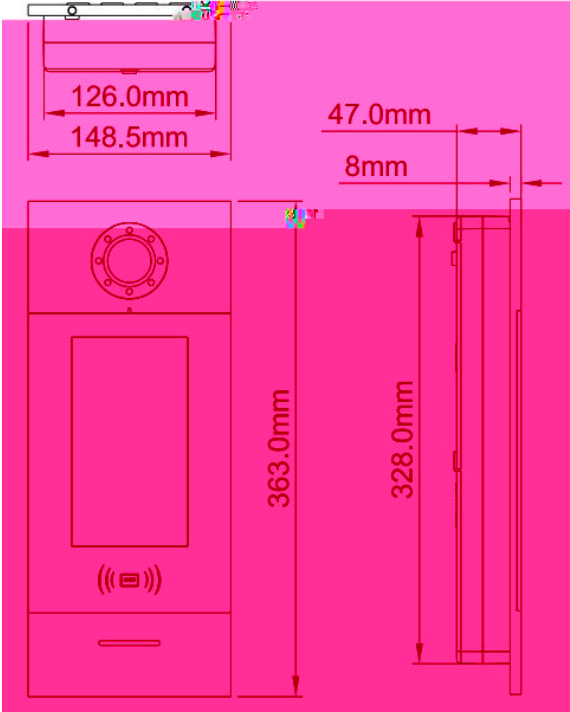

2.3



DC 24V


DC 18-30V

+12V


>18V

3.1

W/H/D 1


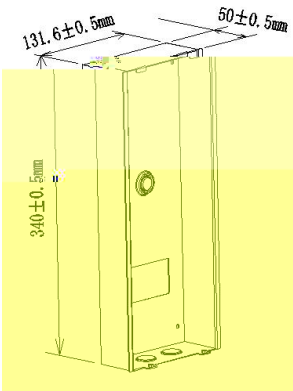


2

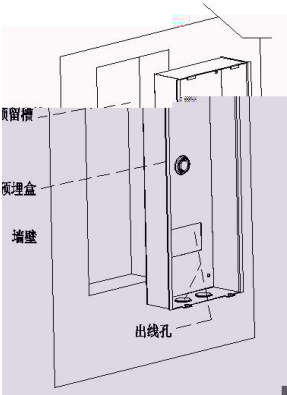


3

4

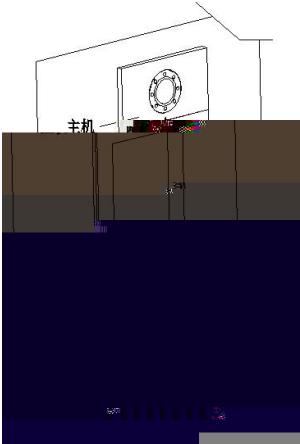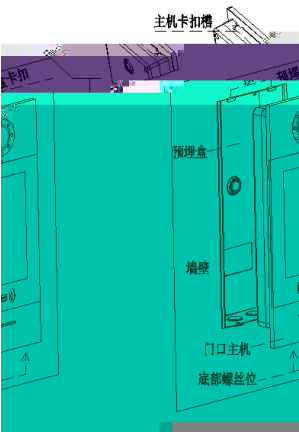

5

3.2

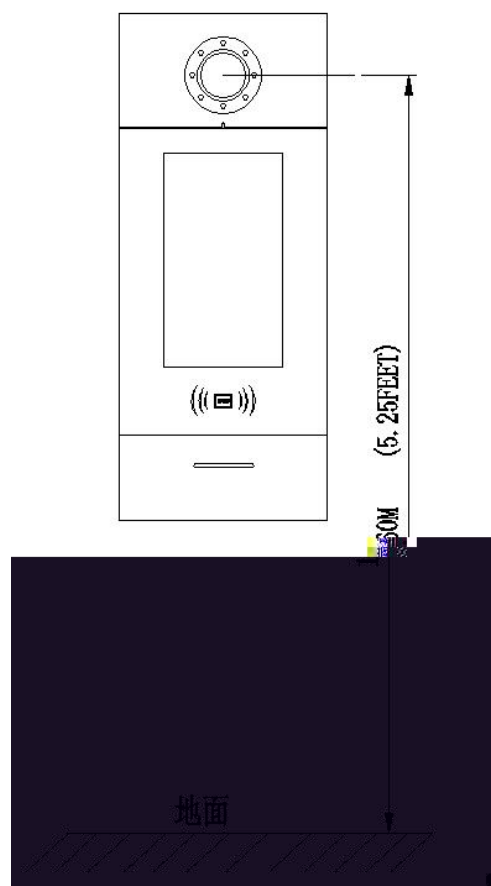

1.6

4.1



4.2

4.2.1




1




2

2718



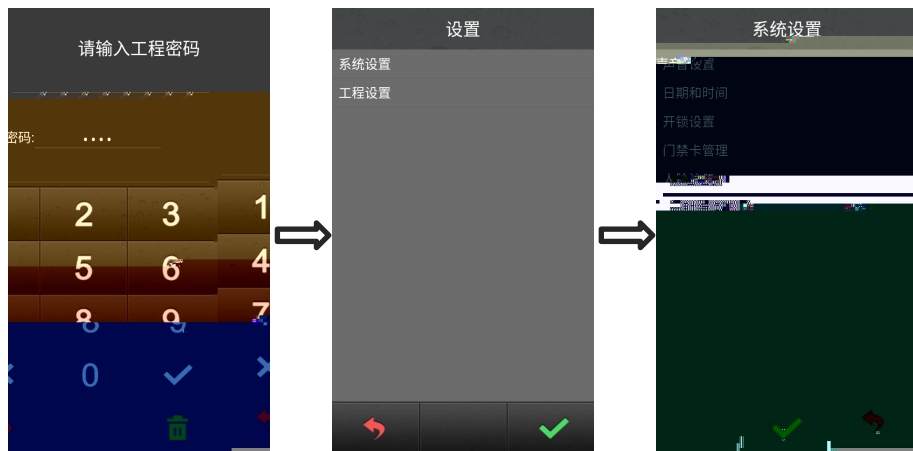

4.2.2

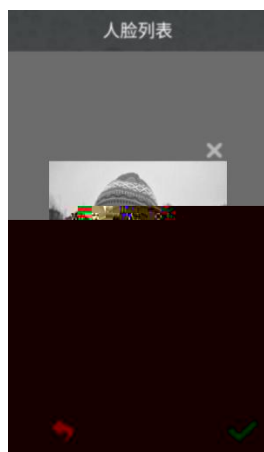


4.3

4.3.1

4.3.2

4.3.3

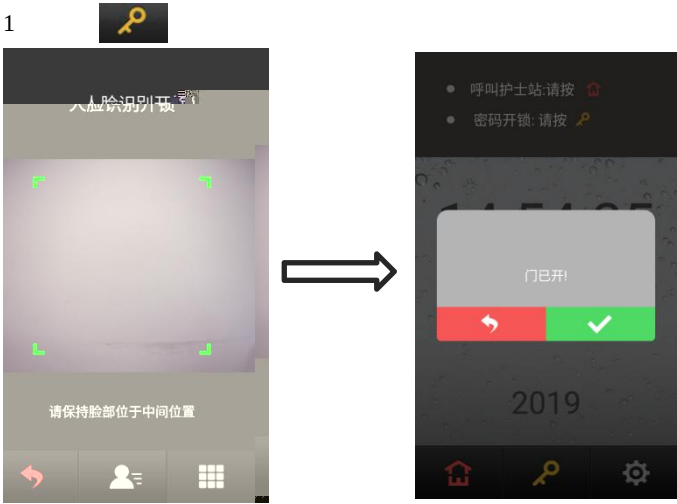

2




4.3.4





3 5678

5.1

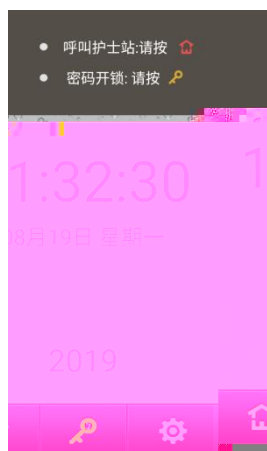


5.2



“2718”

5.3




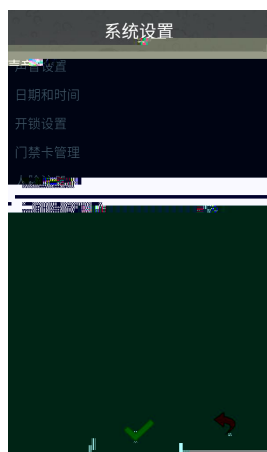

6.1



6.2

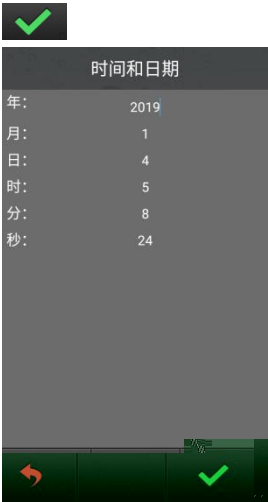

6.3




6.4



●



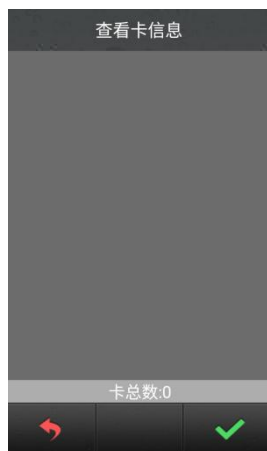

“

”




“


”




“ ”

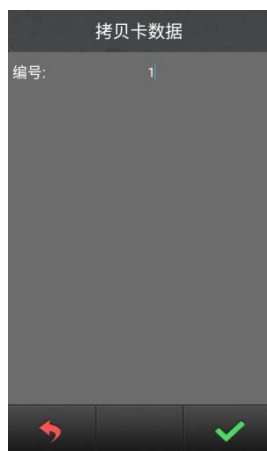

6.5

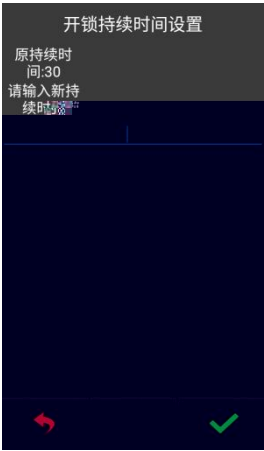

6.6

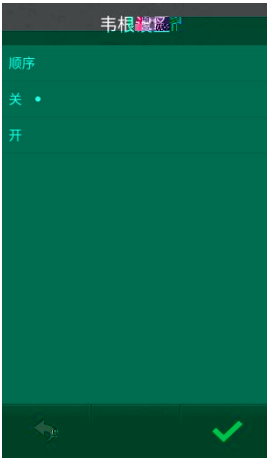



7.1




ip


7.2



7.3

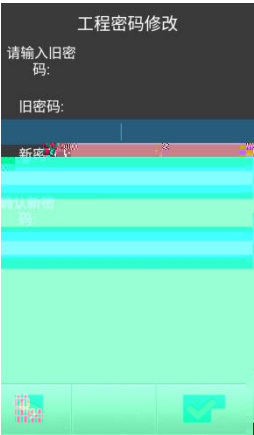

7.4

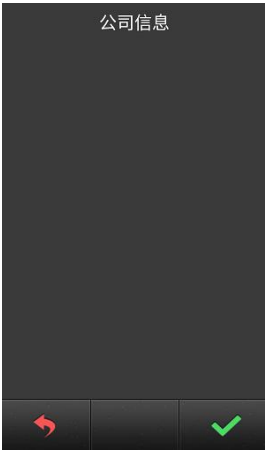

7.5



IP MAC

7.6

